


Bulb MR Series

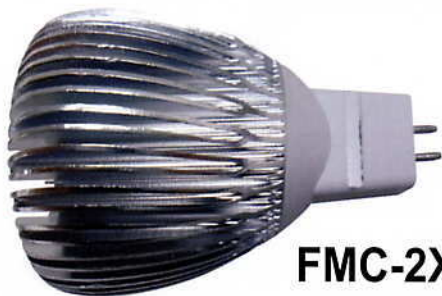

FMC-2XA005-25X

Characterization

1. Environmental protection, no UV light, good thermal dissipation.
2. Small volume. No glare and good light uniformly.
3. Lower electric consumption than traditional lightings.
4. Dimmable function to be applied to different occasion.
5. Variable viewing angle available.
6. The brightness of down light adjustable by AC triac.
7. Life time more than 25,000hrs.



FMA-2XA003-25X

MR Series	MR16			MR11
Model	FMA-2XA003-25X	FMB-2XA005-25X	FMC-2XA005-25X	FME-5A001-25X
Input Voltage Range (V)	AC/DC 12V	AC/DC 12V	AC/DC 12V	AC/DC 12V
Power Consumption (W)	<3	<5	<5	<1
Power Efficiency (%)	>90	>90	>90	>80
Color Temperature (K)	3000/6000	3000/6000	3000/6000	3000/6000
Luminous Flux (lm)	180(ww)/210(cw)	280(ww)/315(cw)	280(ww)/315(cw)	90(ww)/110(cw)
Life Time (hr)	>25,000	>25,000	>25,000	>25,000
View Angle	25°	25°/45°/60°	25°	15°/30°
CRI (%)	80	80	80	80
Dimensions (mm)	φ 49.4*53.9	φ 47.8*52.5	φ 49.0*60.3	φ 35.7*45.7
Weight (g)	35	35	40	15