



Features


- No UV or IR light radiation
- Full range of white colors available
- Ra >75 for white color
- High luminosity output
- Long lifetime > 35000 hours(L₇₀)

Typical Applications


- Indoor Lighting
- Architectural Lighting
- Agricultural Lighting

Characteristics Intensity Distribution Curve

For Deluxe QL2, QL4

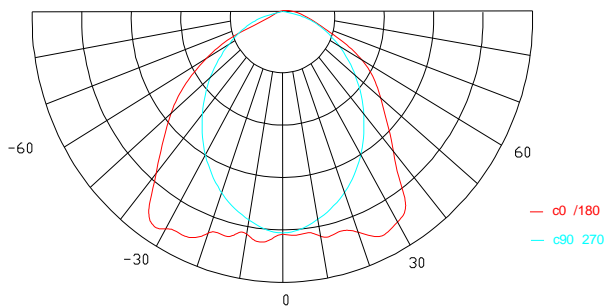

For Deluxe TL2, TL4

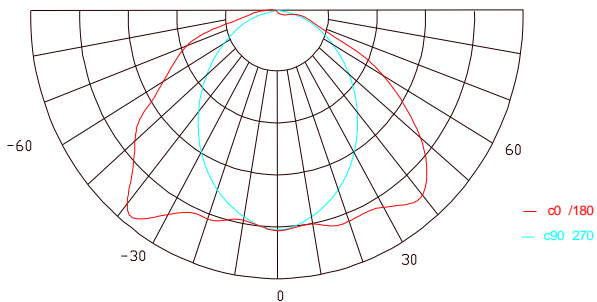

Product Specification

Parameter		Description
Dimension	QL2, TL2	600x600x45 (mm)
	BL4	1210x300x65 (mm)
	QL4, TL4	1210x600x65 (mm)
Light Source		Everlight Cobra Module
Operation Temperature		-20°C~40°C
Storage Temperature		-20°C~60°C
Power Input		100~240 VAC Input
Power Consumption		33 Watt For TL2
		44 Watt For QL2 and BL4
		66 Watt For TL4
		88 Watt For TL4
Power Supplier		Everlight ADP Aadptor
Power Factor		100V AC/60Hz, PF>0.95 230V AC/50Hz, PF>0.9

Coding of part number:

OL – Deluxe / QL2 / P44 / HF / D30 / SR
1 2 3 4 5 6 7

1. Product Series

OL: Office Lighting

2. Luminaire Type

Deluxe: Luminaire for Light-Weight Steel Frames

3. Lighting Source

TL2: 10w Cobra x3
QL2: 10w Cobra x4
BL4: 20w Cobra x2
TL4: 20w Cobra x3
QL4: 20w Cobra x4

4. Power Consumption

P33: 33W (For TL2 only)
P44: 44W (For QL2 and BL4 only)
P66: 66W (For TL4 only)
P88: 88W (For QL4 only)

5. Lens

LF: Lightly Frosted Lens
HF: Heavily Frosted Lens

6. Color Temperature

D30: 2670K~3000K
D40: 3800K~4500K
D50: 5000K~5650K
D60: 5650K~6300K

7. Pack Type

NL: Normal Paper Pack
SR: Shock Resistance Pack