


## THICK FILM CHIP ARRAY

- 04024 Elements 04024R
- 06034 Elements 06034R

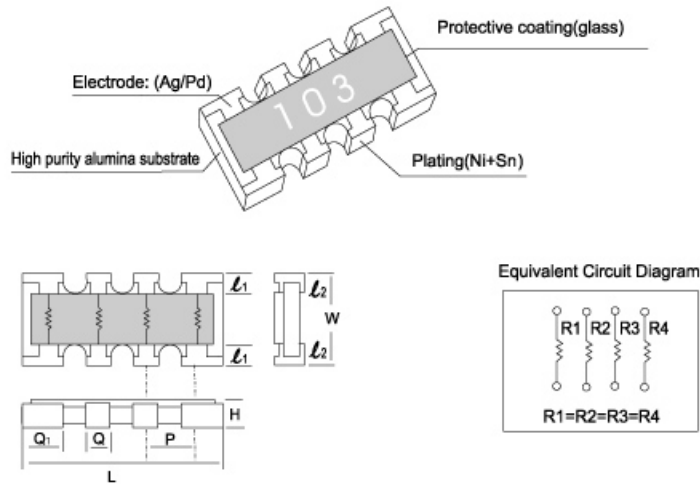


**Unit: mm**

DIMENSION TYPE	L	W	H	$l_1$	$l_2$	P	Q	$Q_1$
4R(0402)	2.00±0.10	1.00±0.10	0.40±0.10	0.20±0.10	0.20±0.10	0.50±0.10	0.30±0.10	0.43±0.10
4R(0603)	3.20±0.20	1.60±0.15	0.50±0.10	0.30±0.20	0.30±0.20	0.80±0.20	0.50±0.10	0.61±0.10

### ● RATINGS

TYPE	Power Rating at 70°C	Rate Current of Jumper(A)	Max Working Voltage(Vw)	Max Over Load Voltage(Vo)	TCR (PPM/°C)	Resistance Tolerance (%)	Resistance Range (Ω)	Operating Temperature (°C)
04024R	0.063W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	
06034R	0.1W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	

- 04022 Elements 04022R
- 06032 Elements 06032R

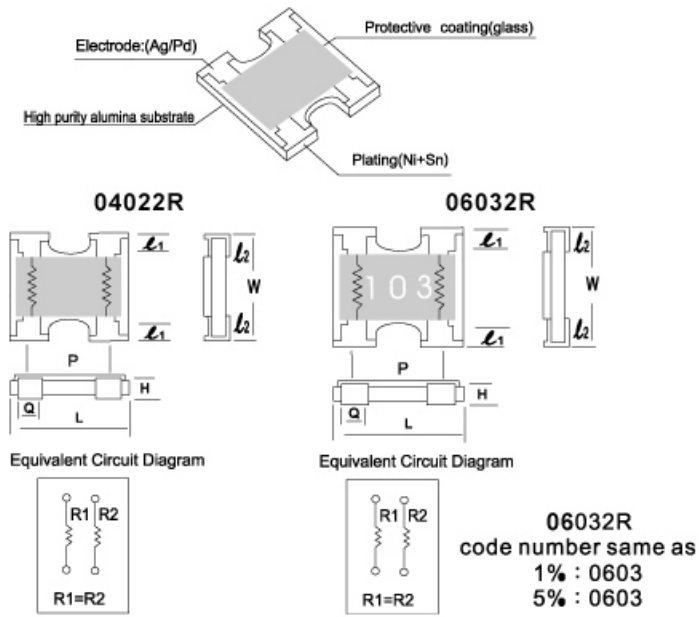


Unit: mm

DIMENSION	L	W	H	$l_1$	$l_2$	P	Q
2R(0402)	1.00± 0.10	1.00± 0.10	0.33± 0.05	0.15± 0.10	0.25± 0.10	0.67± 0.10	0.34± 0.10
2R(0603)	1.60± 0.15	1.60± 0.15	0.50± 0.04	0.30± 0.10	0.30± 0.10	0.99± 0.10	0.61± 0.10

● RATINGS


TYPE	Power Rating at 70°C	Rate Current of Jumper(A)	Max Working Voltage(Vw)	Max Over Load Voltage(Vo)	TCR (PPM/°C)	Resistance Tolerance (%)	Resistance Range (Ω)	Operating Temperature (°C)
04022R	0.063W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	
06032R	0.1W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	

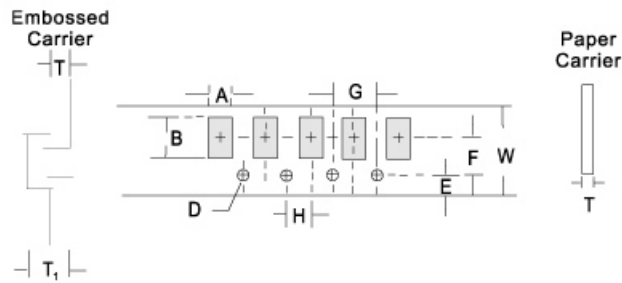


Uminets

	Size	A	B	W	E	F	G	H	T	D	T <sub>1</sub>
Paper	04022R	1.25±0.1	1.25±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.45±0.10	1.50±0.10	
	06032R	1.05±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.60±0.10	1.50±0.10	1.50±0.10	
Type	04024R	1.20±0.1	2.20±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.60±0.10	1.50±0.10	
	06034R	1.90±0.2	3.45±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.75±0.10	1.50±0.10	

● REEL DIMENSION (mm)

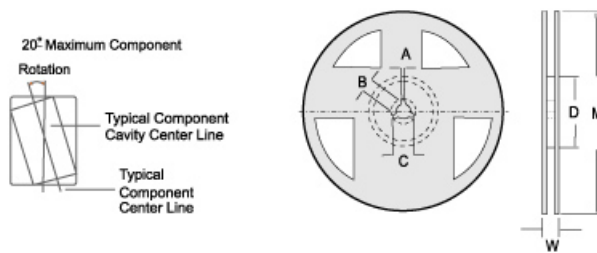

TYPE		SIZE		A	B	C	D	W	M
06032R	7"	5K/Reel		2.0±0.5	13.5±2.0	21±0.5	60±0.5	12.5±2.0	178±2.0
06034R									
04022R	7"	10K/Reel		2.0±0.5	13.5±2.0	21±0.5	60±0.5	12.5±2.0	178±2.0
04024R									

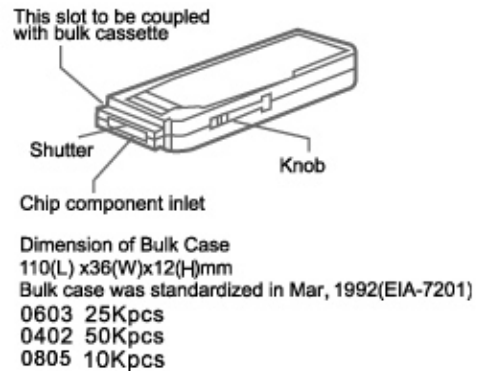

● Explanation of Part Numbers

