

FEATURES

- Pro-Lift hydraulic jacks are designed to meet ASME / PALD requirements
- Built in by-pass system provides protection against ram over travel
- Wide frame ensures safe operation while lifting
- Swivel saddle and swivel rear casters provide for easy positioning

Extra  Low Profile

F-777

2 Ton Low Profile Floor Jack
Lifting Range: 3-1/2" - 14"

(U.S. Patent No. 5,755,099)



G-515

1-1/2 Ton Aluminum Jack
Lifting Range: 3-3/4" - 14-1/2"



G-615

1-1/2 Ton Aluminum Jack
Lifting Range: 3-1/2" - 18"

(U.S. Patent No. 5,755,099)



| Model | Capacity | UPC | Lift Range | Package Dimensions | Case Pk. | G.W. |
|-------|-----------|--------------|------------------|----------------------------|----------|---------|
| F-777 | 2 Ton | 652597215222 | 3-1/2" - 14" | 24" x 9-1/4" x 6-3/8" | 1 | 33 lbs. |
| G-515 | 1-1/2 Ton | 652597528926 | 3-3/4" - 14-1/2" | 24-3/4" x 13-1/4" x 6-1/2" | 1 | 35 lbs. |
| G-615 | 1-1/2 Ton | 652597024848 | 3-1/2" - 18" | 29-1/4" x 15-1/2" x 7-3/4" | 1 | 40 lbs. |




T-2215

1,500 lbs. rated capacity
 Motorcycle Lift
 Lifting Range: 4-1/2" - 16-1/2"



T-9400

2,200 lbs. rated capacity
 Hydraulic Scissor Jack
 Hydraulic Mechanism (with carrying case)
 Lifting Range: 4-3/4" - 15"

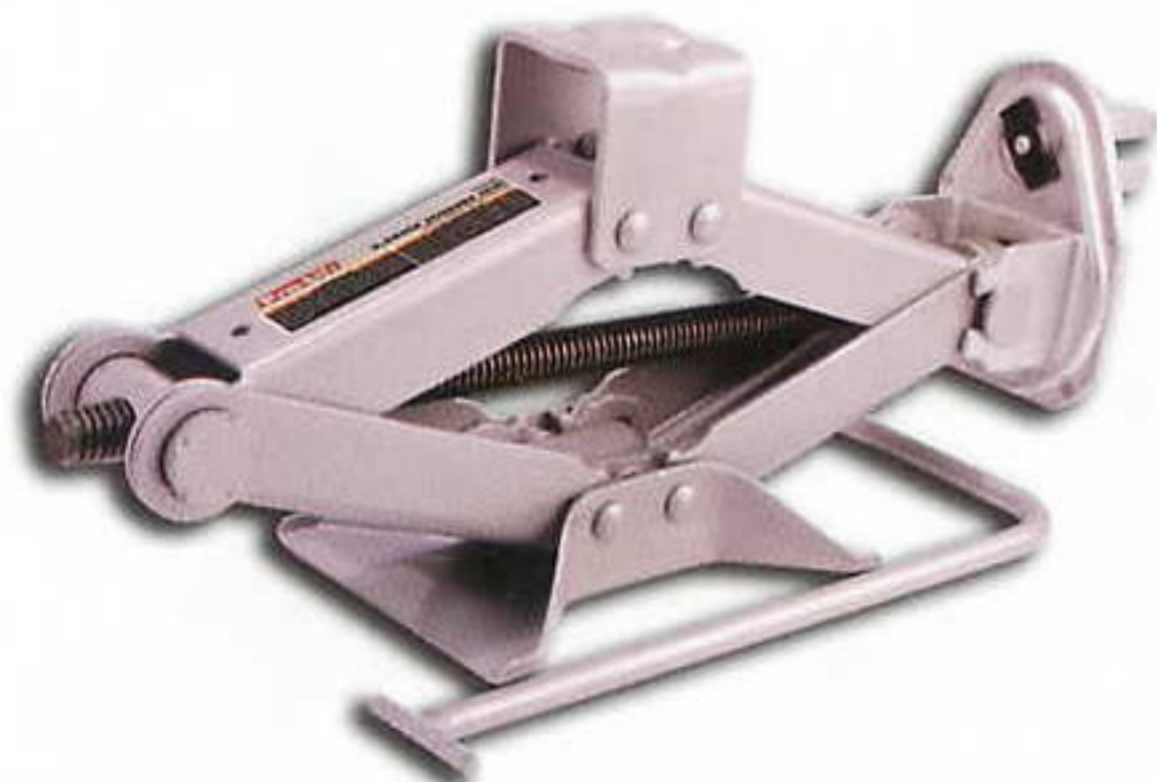

T-9446

3,300 lbs. rated capacity
 Scissor Jack
 Gear Reduction Mechanism
 Lifting Range: 4-1/4" - 14-1/8"

| Model | Capacity | UPC | Lift Range | Package Dimensions | Case Pk. | G.W. |
|--------|------------|--------------|------------------|-----------------------------|----------|---------|
| T-2215 | 1,500 lbs. | 652597528889 | 4-1/2" - 16-1/2" | 21-3/4" x 16-1/4" x 34" | 1 | 95 lbs. |
| T-9400 | 2,200 lbs. | 652597215017 | 4-3/4" - 15" | 17-1/2" x 7-7/8" x 5-15/16" | 1 | 38 lbs. |
| T-9446 | 3,300 lbs. | 652597215031 | 4-1/4" - 14-1/8" | 16-3/4" x 5" x 5-1/8" | 4 | 43 lbs. |